

Electrode Holders & Clamps



Eco Holder Confort

An open head electrode holder with a fully insulated head and handle.

Confort 200, 200 A (35%)	0700 006 004
Confort 300, 300 A (35%)	0700 006 005
Confort 400, 400 A (35%)	0700 006 015



Eco Holder Prima

A closed head electrode holder with a fully insulated head and handle.

Prima 200, 200 A (35%)	0700 006 006
Prima 300, 300 A (35%)	0700 006 007
Prima 400, 400 A (35%)	0700 006 014



Murex Handicool

This is a crocodile style electrode holder, which is made from black phenolic resin insulated jaws and black handle. The holder is fully insulated for extra safety and copper jaws for good contact.

400 A Handicool Electrode Holder	0700 605 376
600 A Handicool Electrode Holder	0700 605 378



Murex Econ

This is a twist grip, short stub electrode holder. All the electrode is available for use and the angle allows the hand to remain away from the weld pool. The handle is used to apply torque to the electrode clamp in the head.

Econ 405 Electrode Holder	0701 380 433
Econ 605 Electrode Holder	0701 380 434

Return Clamps



MK 150, MP 200, MP 300 and MP450

The MK 150 is a fully galvanised earth clamp with a maximum opening of 50mm. The MP 200, MP 300 and MP 450 are robust earth clamps with strong gripping power for good contact. The maximum opening for the MP 200 is 50mm and 55mm and 60mm for the MP 300 and MP 450 respectively.


MK 150, 150 A (35%)	0682 103 801
MP 200, 200 A (35%)	0367 558 880
MP 300, 300 A (35%)	0682 103 803
MP 450, 450 A (35%)	0000 419 450



Eco Clamps

An earth clamp that provides good contact with the work piece and is available in two sizes.

Eco clamp 250, 250 A (35%)	0700 006 001
Eco clamp 400, 400 A (35%)	0700 006 002

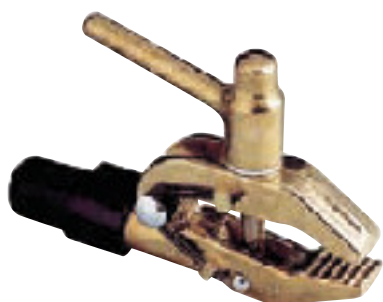

Return Clamp EG 600 and JK3

The EG 600 is an extremely robust earth clamp made of brass. The welding cable is attached using a hexagonal socket screw and the clamp has a maximum opening of 50mm and a maximum capacity of 600 amperes. The JK3 is a C-clamp model, galvanised and with a maximum opening of 48mm and maximum capacity of 500 amperes.

EG 600, 600 A (35%)	0160 288 001
JK3, 500 A (35%)	0000 103 588



Return Clamp CC11

This clamp is robustly constructed from substantial castings. The screw lever allows maximum compression to the workpiece. Suitable for up to 600 amps.

CC11 Screw Type Earth Clamp	0701 400 000
-----------------------------	---------------------



Magnetic Earth Clamps

Magnetic earth clamps with strong gripping power that permits attachment to any ferrous object. These clamps provide a large contact area with less overheating thanks to fewer junctions.

Magnetic earth clamp 400 A (35%)	0000 500 415
Magnetic earth clamp 600 A (35%)	0000 500 416

This document was created with Win2PDF available at <http://www.win2pdf.com>.
The unregistered version of Win2PDF is for evaluation or non-commercial use only.
This page will not be added after purchasing Win2PDF.